

# **Tiamulin Fumarate**



#### SYNONYMS

C28-H47-N-O4-S.C4-H4-O4, "acetic acid, [(2-(diethylamino)ethyl)thio]-, -ethenyldecahydro-5-hydroxy-", "4, 6, 9, 10-tetramethyl-1-oxo-3-alpha, 9-propano-3-alpha-H-", "cyclopentacycloocten-8-yl ester, (E)-2-butenedioate (1:1) salt", "14-desossi-14-[(2dietilaminoetil)mercaptoacetossi)mutilin idrogeno", fumarate, "14-deoxy-14-[(2-diethlaminoethyl)-mercaptoacetoxy)mutilin hydrogen", "tiamulin hydrogen fumarate", Denagard, Dynamutilin, 81723hfu, "SQ 22947", "Thiamutilin fumarate", Tiamutin, Tiavet, "diterpene antibacterial", pleuromutilin, "valnemulin analogue"

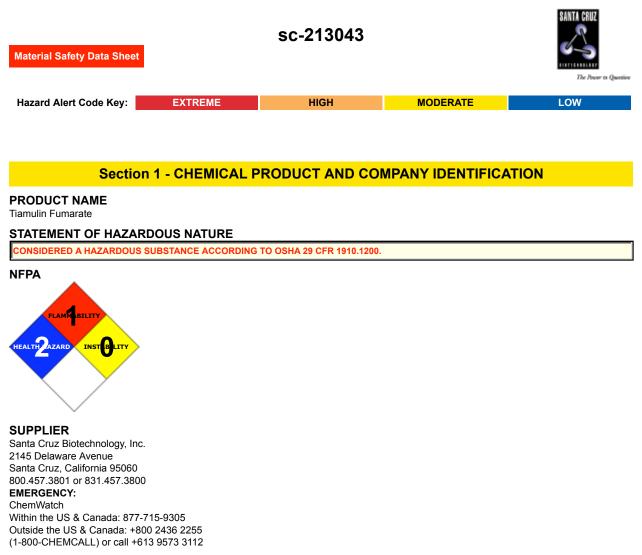

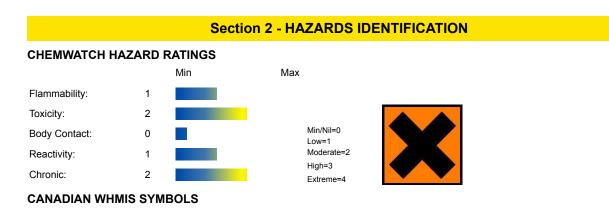

# **EMERGENCY OVERVIEW**

#### RISK

Harmful if swallowed. May cause SENSITISATION by inhalation and skin contact.

### POTENTIAL HEALTH EFFECTS

### ACUTE HEALTH EFFECTS

# SWALLOWED

• Accidental ingestion of the material may be harmful; animal experiments indicate that ingestion of less than 150 gram may be fatal or may produce serious damage to the health of the individual.

#### EYE

Although the material is not thought to be an irritant, direct contact with the eye may cause transient discomfort characterized by tearing or conjunctival redness (as with windburn). Slight abrasive damage may also result.

# <\p>.

# SKIN

• Skin contact is not thought to produce harmful health effects (as classified using animal models). Systemic harm, however, has been identified following exposure of animals by at least one other route and the material may still produce health damage following entry through wounds, lesions or abrasions.

<\p>.

• Open cuts, abraded or irritated skin should not be exposed to this material.

■ Entry into the blood-stream, through, for example, cuts, abrasions or lesions, may produce systemic injury with harmful effects. Examine the skin prior to the use of the material and ensure that any external damage is suitably protected.

#### INHALED

• The material is not thought to produce either adverse health effects or irritation of the respiratory tract following inhalation (as classified using animal models). Nevertheless, adverse effects have been produced following exposure of animals by at least one other route and good hygiene practice requires that exposure be kept to a minimum and that suitable control measures be used in an occupational setting.

Persons with impaired respiratory function, airway diseases and conditions such as emphysema or chronic bronchitis, may incur further disability if excessive concentrations of particulate are inhaled.

### **CHRONIC HEALTH EFFECTS**

Inhaling this product is more likely to cause a sensitization reaction in some persons compared to the general population.

Skin contact with the material is more likely to cause a sensitization reaction in some persons compared to the general population.

Long term exposure to high dust concentrations may cause changes in lung function i.e. pneumoconiosis; caused by particles less than 0.5 micron penetrating and remaining in the lung.

<\p>.

	Section 3 - COMPOSITION / INFORMATION ON INGREDIENTS			
NAME		CAS RN	%	
tiamulin fumarate		55297-96-6	>98	

# **Section 4 - FIRST AID MEASURES**

#### SWALLOWED

 $\cdot$  IF SWALLOWED, REFER FOR MEDICAL ATTENTION, WHERE POSSIBLE, WITHOUT DELAY.  $\cdot$  Where Medical attention is not immediately available or where the patient is more than 15 minutes from a hospital or unless instructed otherwise:

#### EYE

• If this product comes in contact with the eyes: · Wash out immediately with fresh running water. · Ensure complete irrigation of the eye by keeping eyelids apart and away from eye and moving the eyelids by occasionally lifting the upper and lower lids.

# SKIN

■ If skin contact occurs: · Immediately remove all contaminated clothing, including footwear · Flush skin and hair with running water (and soap if available).

### INHALED

· If fumes or combustion products are inhaled remove from contaminated area. · Other measures are usually unnecessary.

#### NOTES TO PHYSICIAN

■ for poisons (where specific treatment regime is absent):

-----BASIC TREATMENT

<sup>·</sup> Establish a patent airway with suction where necessary.

· Watch for signs of respiratory insufficiency and assist ventilation as necessary.

Treat symptomatically.

Section 5 - FIRE FIGHTING MEASURES					
Vapour Pressure (mmHG):	Negligible				
Upper Explosive Limit (%):	Not Available				
Specific Gravity (water=1):	Not Available				
Lower Explosive Limit (%):	Not Available				

#### **EXTINGUISHING MEDIA**

 $\cdot$  Water spray or fog.

· Foam.

### FIRE FIGHTING

· Alert Emergency Responders and tell them location and nature of hazard.

· Wear breathing apparatus plus protective gloves.

# GENERAL FIRE HAZARDS/HAZARDOUS COMBUSTIBLE PRODUCTS

· Combustible solid which burns but propagates flame with difficulty.

• Avoid generating dust, particularly clouds of dust in a confined or unventilated space as dusts may form an explosive mixture with air, and any source of ignition, i.e. flame or spark, will cause fire or explosion. Dust clouds generated by the fine grinding of the solid are a particular hazard; accumulations of fine dust may burn rapidly and fiercely if ignited.

Combustion products include: carbon monoxide (CO), carbon dioxide (CO2), nitrogen oxides (NOx), sulfur oxides (SOx), other pyrolysis products typical of burning organic material.

May emit poisonous fumes.

May emit corrosive fumes.

### FIRE INCOMPATIBILITY

Avoid contamination with oxidizing agents i.e. nitrates, oxidizing acids, chlorine bleaches, pool chlorine etc. as ignition may result.

# PERSONAL PROTECTION

Glasses: Chemical goggles. Gloves: Respirator: Particulate

# **Section 6 - ACCIDENTAL RELEASE MEASURES**

### MINOR SPILLS

- $\cdot$  Clean up waste regularly and abnormal spills immediately.
- Avoid breathing dust and contact with skin and eyes.
- $\cdot$  Wear protective clothing, gloves, safety glasses and dust respirator.
- · Use dry clean up procedures and avoid generating dust.
- · Vacuum up or sweep up. NOTE: Vacuum cleaner must be fitted with an exhaust micro filter (HEPA type) (consider explosion-proof machines designed to be grounded during storage and use).
- · Dampen with water to prevent dusting before sweeping.
- $\cdot$  Place in suitable containers for disposal.
- MAJOR SPILLS
- Moderate hazard.
- · CAUTION: Advise personnel in area.
- · Alert Emergency Responders and tell them location and nature of hazard.

# **Section 7 - HANDLING AND STORAGE**

### **PROCEDURE FOR HANDLING**

 $\cdot$  Avoid all personal contact, including inhalation.

· Wear protective clothing when risk of exposure occurs.

Empty containers may contain residual dust which has the potential to accumulate following settling. Such dusts may explode in the presence of an appropriate ignition source.

· Do NOT cut, drill, grind or weld such containers.

· In addition ensure such activity is not performed near full, partially empty or empty containers without appropriate workplace safety authorisation or permit.

# **RECOMMENDED STORAGE METHODS**

### Glass container.

- · Polyethylene or polypropylene container.
- · Check all containers are clearly labelled and free from leaks.
- STORAGE REQUIREMENTS

#### · Store in original containers.

# Section 8 - EXPOSURE CONTROLS / PERSONAL PROTECTION

### **EXPOSURE CONTROLS**

The following materials had no OELs on our records

• tiamulin fumarate: CAS:55297-96-6 CAS:56193-13-6

#### PERSONAL PROTECTION



### RESPIRATOR

Particulate

Consult your EHS staff for recommendations

#### EYE

When handling very small quantities of the material eye protection may not be required.

- For laboratory, larger scale or bulk handling or where regular exposure in an occupational setting occurs:
- · Chemical goggles
- · Face shield. Full face shield may be required for supplementary but never for primary protection of eyes

• Contact lenses may pose a special hazard; soft contact lenses may absorb and concentrate irritants. A written policy document, describing the wearing of lens or restrictions on use, should be created for each workplace or task. This should include a review of lens absorption and adsorption for the class of chemicals in use and an account of injury experience. Medical and first-aid personnel should be trained in their removal and suitable equipment should be readily available. In the event of chemical exposure, begin eye irrigation immediately and remove contact lens as soon as practicable. Lens should be removed at the first signs of eye redness or irritation - lens should be removed in a clean environment only after workers have washed hands thoroughly. [CDC NIOSH Current Intelligence Bulletin 59].

# HANDS/FEET

• NOTE: The material may produce skin sensitization in predisposed individuals. Care must be taken, when removing gloves and other protective equipment, to avoid all possible skin contact.

Suitability and durability of glove type is dependent on usage. Important factors in the selection of gloves include: such as:

· frequency and duration of contact,

· chemical resistance of glove material,

· glove thickness and

dexterity

Select gloves tested to a relevant standard (e.g. Europe EN 374, US F739).

• When prolonged or frequently repeated contact may occur, a glove with a protection class of 5 or higher (breakthrough time greater than 240 minutes according to EN 374) is recommended.

• When only brief contact is expected, a glove with a protection class of 3 or higher (breakthrough time greater than 60 minutes according to EN 374) is recommended.

· Contaminated gloves should be replaced.

Gloves must only be worn on clean hands. After using gloves, hands should be washed and dried thoroughly. Application of a non-perfumed moisturiser is recommended.

- · Rubber gloves (nitrile or low-protein, powder-free latex). Employees allergic to latex gloves should use nitrile gloves in preference.
- · Double gloving should be considered.
- · PVC gloves.
- · Protective shoe covers.
- · Head covering.

Experience indicates that the following polymers are suitable as glove materials for protection against undissolved, dry solids, where abrasive particles are not present.

- · polychloroprene
- · nitrile rubber
- · butyl rubber
- · fluorocaoutchouc
- · polyvinyl chloride

· polyvinyi chionde

Gloves should be examined for wear and/ or degradation constantly.

#### OTHER

· For quantities up to 500 grams a laboratory coat may be suitable.

· For quantities up to 1 kilogram a disposable laboratory coat or coverall of low permeability is recommended. Coveralls should be buttoned at collar and cuffs.

· For quantities over 1 kilogram and manufacturing operations, wear disposable coverall of low permeability and disposable shoe covers.

- For manufacturing operations, air-supplied full body suits may be required for the provision of advanced respiratory protection.
- · Eve wash unit.

· Ensure there is ready access to an emergency shower.

· For Emergencies: Vinyl suit.

# ENGINEERING CONTROLS

Enclosed local exhaust ventilation is required at points of dust, fume or vapor generation. HEPA terminated local exhaust ventilation should be considered at point of generation of dust, fumes or vapors.

# **Section 9 - PHYSICAL AND CHEMICAL PROPERTIES**

# PHYSICAL PROPERTIES

Mixes with water.			
State	Divided Solid	Molecular Weight	609.9
Melting Range (°F)	296.6- 298.4	Viscosity	Not Applicable
Boiling Range (°F)	Not Applicable	Solubility in water (g/L)	Miscible
Flash Point (°F)	Not Available	pH (1% solution)	Not Applicable
Decomposition Temp (°F)	Not Available	pH (as supplied)	Not Applicable
Autoignition Temp (°F)	Not Available	Vapour Pressure (mmHG)	Negligible
Upper Explosive Limit (%)	Not Available	Specific Gravity (water=1)	Not Available
Lower Explosive Limit (%)	Not Available	Relative Vapor Density (air=1)	Not Applicable
Volatile Component (%vol)	Negligible	Evaporation Rate	Not Applicable

#### APPEARANCE

White crystalline solid; mixes with water. Soluble in ethyl acetate. Flammability Color Physical State Odor Miscibility with water - White Solid Miscible

# Section 10 - CHEMICAL STABILITY

# CONDITIONS CONTRIBUTING TO INSTABILITY

Presence of incompatible materials.

 $\cdot$  Product is considered stable.

### STORAGE INCOMPATIBILITY

Avoid reaction with oxidizing agents.

For incompatible materials - refer to Section 7 - Handling and Storage.

# Section 11 - TOXICOLOGICAL INFORMATION

# TIAMULIN FUMARATE

#### TOXICITY AND IRRITATION

■ unless otherwise specified data extracted from RTECS - Register of Toxic Effects of Chemical Substances.

TOXICITY	IRRITATION
Oral (Mouse) LD50: 841 mg/kg	
Subcutaneous (Mouse) LD50: 521 mg/kg	

#### Oral (Rat) LD50: 1000 mg/kg \*

Allergic reactions involving the respiratory tract are usually due to interactions between IgE antibodies and allergens and occur rapidly.
Allergic potential of the allergen and period of exposure often determine the severity of symptoms.

<\p>.

Attention should be paid to atopic diathesis, characterized by increased susceptibility to nasal inflammation, asthma and eczema. Exogenous allergic alveolitis is induced essentially by allergen specific immune-complexes of the IgG type; cell-mediated reactions (T

lymphocytes) may be involved. Such allergy is of the delayed type with onset up to four hours following exposure.

Contact allergies quickly manifest themselves as contact eczema, more rarely as urticaria or Quincke's edema. The pathogenesis of contact eczema involves a cell-mediated (T lymphocytes) immune reaction of the delayed type.

<\p>.

\* for technical grade >= 80% \*

May cause sensitisation by skin contact and inhalation \*

Prolonged exposure may be harmful \*

Novartis MSDS \*

A toxicological ADI of 0.03 mg/ kg bw, i.e 1.8 mg per person was established by applying a safety factor of 100 to the NOEL of 3 mg/ kg bw/ day using 26 and 54-week studies in dogs based on electrocardiogram changes and raised serum alanine aminotransferase and lactate dehydrogenase concentrations at higher doses.

Hydrolysed to 8-alpha-hydroxytiamulin

# **Section 12 - ECOLOGICAL INFORMATION**

No data

# **Section 13 - DISPOSAL CONSIDERATIONS**

#### **Disposal Instructions**

All waste must be handled in accordance with local, state and federal regulations.

Puncture containers to prevent re-use and bury at an authorized landfill.

Legislation addressing waste disposal requirements may differ by country, state and/ or territory. Each user must refer to laws operating in their area. In some areas, certain wastes must be tracked.

A Hierarchy of Controls seems to be common - the user should investigate:

- ·Reduction
- · Reuse
- · Recycling
- · Disposal (if all else fails)

This material may be recycled if unused, or if it has not been contaminated so as to make it unsuitable for its intended use. Shelf life considerations should also be applied in making decisions of this type. Note that properties of a material may change in use, and recycling or reuse may not always be appropriate.

DO NOT allow wash water from cleaning equipment to enter drains. Collect all wash water for treatment before disposal.

· Recycle wherever possible.

· Consult manufacturer for recycling options or consult Waste Management Authority for disposal if no suitable treatment or disposal facility can be identified.

# **Section 14 - TRANSPORTATION INFORMATION**

NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS: DOT, IATA, IMDG

# Section 15 - REGULATORY INFORMATION



REGULATIONS

No data for tiamulin fumarate (CAS: , 55297-96-6, 56193-13-6)

# **Section 16 - OTHER INFORMATION**

Ingredients with multiple CAS Nos Ingredient Name CAS tiamulin fumarate 55297-96-6, 56193-13-6

Reasonable care has been taken in the preparation of this information, but the author makes no warranty of merchantability or any other warranty, expressed or implied, with respect to this information. The author makes no representations and assumes no liability for any direct, incidental or consequential damages resulting from its use. For additional technical information please call our toxicology department on +800 CHEMCALL.

Classification of the preparation and its individual components has drawn on official and authoritative sources as well as independent review by the Chemwatch Classification committee using available literature references. A list of reference resources used to assist the committee may be found at: www.chemwatch.net/references.

• The (M)SDS is a Hazard Communication tool and should be used to assist in the Risk Assessment. Many factors determine whether the reported Hazards are Risks in the workplace or other settings. Risks may be determined by reference to Exposures Scenarios. Scale of use, frequency of use and current or available engineering controls must be considered.

This document is copyright. Apart from any fair dealing for the purposes of private study, research, review or criticism, as permitted under the Copyright Act, no part may be reproduced by any process without written permission from CHEMWATCH. TEL (+61 3) 9572 4700.

Issue Date: Sep-19-2008 Print Date:Oct-19-2010